
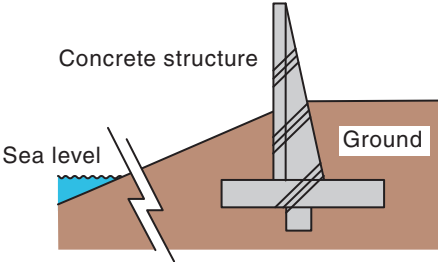
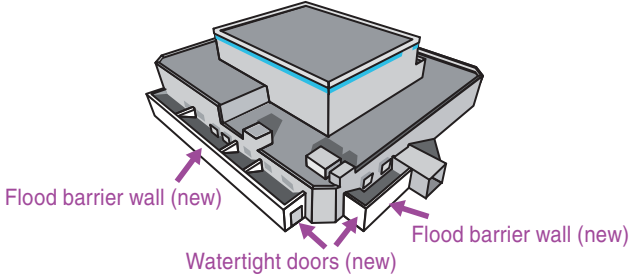
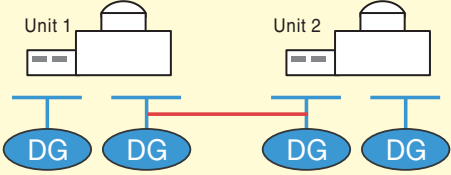

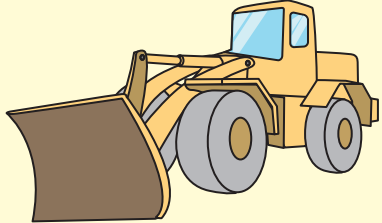


# Examples of Safety Assurance Measures Implemented After the Fukushima Daiichi Accident

	Short Term Measures (completed)	Mid & Long Term Measures (to be implemented in a few years)
Emergency Safety Measures	<p>Additional deployment of emergency power source vehicles</p> 	<p>Installation of coastal levee</p>  <p>Installation of flood barrier wall</p> 
Measures for Enhancing Power Supplies	<p>Interconnection of emergency diesel generators between units</p> 	<p>Inspection of transmission line towers and measures against earthquakes and tsunamis</p> 
Severe Accident Measures	<p>Deployment of wheel loaders</p> 	<p>Installation of the reactor building ventilation and hydrogen detectors (BWR)</p> 